

DOWN LIGHT

SERIES PLC




◆ Scope of Application

Accent Lighting, General Lighting,

◆ Hallway Lighting, etc. Indoor use only

Non-scaled fixture only, Improper use

◆ will result voided warranty

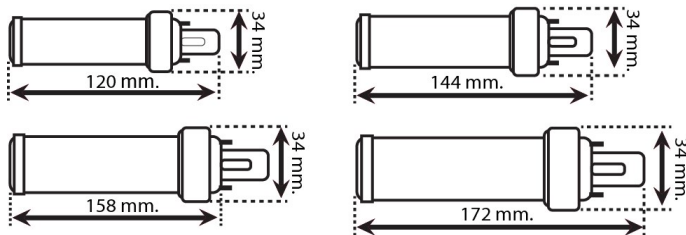

Parameter	Value			
Model	KPLC5W	KPLC7W	KPLC9W	KPLC11W
Rate Power	5W	7W	9W	11W
Luminous Flux	450-650lm	650-800lm	800-950lm	950-1150lm
Luminous Efficiency	>90lm			
Color Temperature	CCT 2700K/3000K/4000K/6000K			
Color Rendering Index	>80 Ra			
Input Voltage	AC 185-265V , 50/60Hz			
Power factor	> 0.9			
Beam Angle	160°			
Work Temperature	-40°C to +50°C			
Work Life	>20,000 Hours			
Dimensions	120*34 mm	144*34 mm	158*34 mm	172*34 mm